

MODKit M061 S

Option:
with handwinding wheel




Option:
manual release

Technical Data

Type of Machine		PMC145-2 M, PMC145-2 L
Suspension	r	1:1
Rated load	Q [kg]	up to 675
Rated speed	v [m/s]	1,0
Rope departure at drive flexible	ASL [mm]	from 555 to 765
Diameter of traction sheave	DT [mm]	210 / 240
Diameter of ropes	d [mm]	6 / 6,5 / 6,7
Number of ropes max.		12
Number of grooves max.	z	12
Type of groove		seat / v-groove
No. of switching operations		180
Duty cycle	ED %	40
Version of brake		2-surface disc brake (safety brake) option: with manual release
Brake monitoring		with microswitch
Protection class		IP 21
Pulley diameter	DT [mm]	240

- Pre-assembled machine frame on stock
- Machine available from stock

Dimensions:

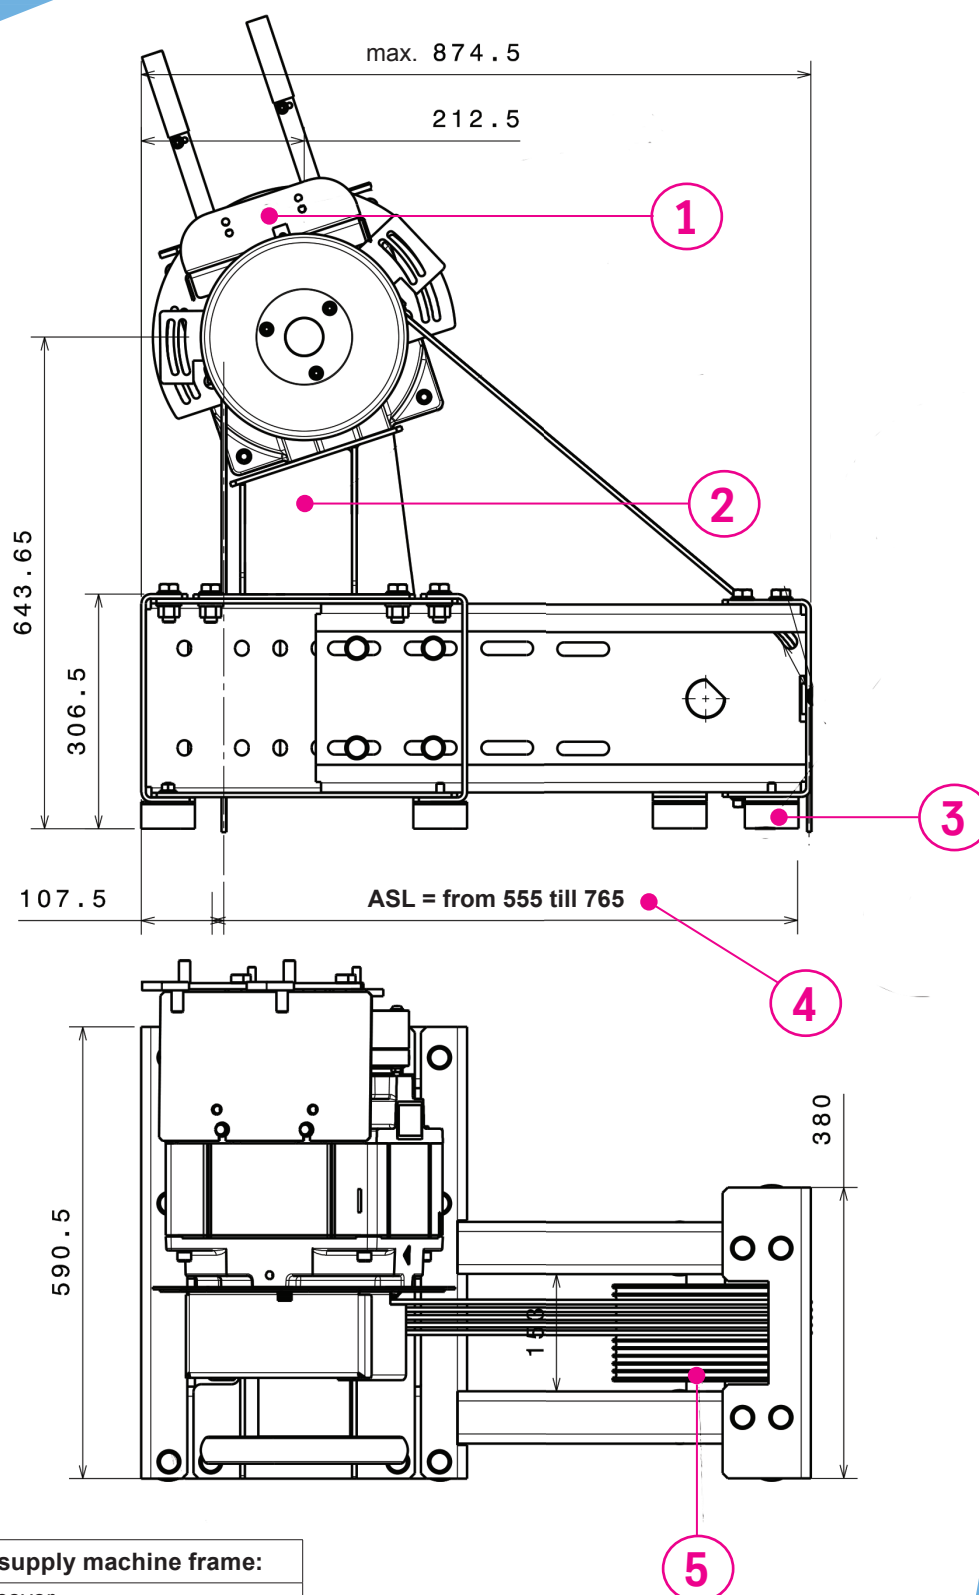

Scope of supply machine frame:

1	Rope cover
2	Console
3	Rubber element
4	Frame telescopic
5	Axle, diverter pulley

Version 09/2014

The details quoted in this Product Information can only be viewed as binding when confirmed expressly in writing. Reproduction, reprint and storage only with authorisation of the editor.

LiftEquip GmbH Elevator Components
 Bernhaeuser Strasse 45
 73765 Neuhausen a.d.F., Germany
 Tel.: +49 (0) 71 58 12 - 2929
 Fax: +49 (0) 71 58 12 - 2971
 E-Mail: kontakt@liftequip.de
 Internet: www.liftequip.com

LiftEquip®
 ELEVATOR COMPONENTS